



## ***Powered Access Selection Guide***



**+44 (0)1908 383100 • +44 (0)330 090 4100**

***[www.reactaccess.com](http://www.reactaccess.com)***

# CONTENTS

## Information

Equipment Sales	3
Service and Refurbishment	4
Training	5
Safety	6
Accessories	7
National Coverage	8

## Product Specification

Low Level Access	9
Electric Scissor Lifts	19
Large Diesel Scissor Lifts	34
Mast/Articulated Booms	40
Telescopic Boom Lifts	54
Specialist Access	58
Aviation	60

# EQUIPMENT SALES

React Access are able to offer a comprehensive range of access equipment to meet your requirements, whether you are looking for new or used equipment.

Our team has vast experience across a range of industries, specialising in Aviation, Rail, Facilities Management and Warehousing, so you can be sure we can offer the right solution for your application.

Please get in contact with us to arrange one of our experts to visit your site.



# SERVICE AND REFURBISHMENT

## Service and Maintenance

Here at React Access we specialise in the service and maintenance of access platforms rather than think of it as a bolt on to our business.

We can tailor your needs and provide you with the service agreement you need for your business.

- ✓ Fast response breakdown service
- ✓ Nationwide cover
- ✓ Next day parts replacement
- ✓ One off LOLER and PUWER examinations
- ✓ Repair and refurbishment programmes
- ✓ Service and repair of all manufacturers makes and models
- ✓ Scheduled maintenance and servicing
- ✓ Technical advice and support

Let us take the hassle out of your maintenance and LOLER obligations.



# TRAINING

At React Access our personal approach to customer service makes us unique, as we truly care about the experience you have with us and the training that is delivered to you.

Training in the workplace is paramount, it improves safety and is a legal requirement that 'employees are given adequate training'.

The Health and Safety at Work Act 1974 and Provision and Use of Work Equipment Regulations 1998 clearly outline the obligations for training.

## IPAF Courses

- ✓ IPAF Operator Training 3A, 3B, 1A & 1B
- ✓ IPAF PAV "Push Around Vertical" Training
- ✓ IPAF Harness Training
- ✓ IPAF "Load and Unloading" Training
- ✓ IPAF Pre Delivery Inspection (PDI)

## PASMA Scaffold Tower Training

- ✓ Towers for Users
- ✓ Towers for Managers
- ✓ Low Level Access
- ✓ Combines Towers and Low Level
- ✓ Work at Height Essentials

## Harness Inspector Training Course

- ✓ IPAF Harness Inspection training

# SAFETY

## Secondary Guarding System

The secondary guarding system is designed to reduce the risks associated with entrapment. It stops the MEWP when an entrapment situation is detected, to prevent further crushing.

The system also has a flashing light and emergency klaxon to attract the attention of colleagues at ground level to enact the emergency lowering procedure.

The pressure sensitive system, which immediately acts as an 'emergency switch' in an entrapment situation, is designed to react to the body pressure of an operator trapped against the ground (bottom) control panel. It is a CE certified retro-fit system capable of being fitted to most boom-type MEWPs.

Look for the secondary guarding icon to identify which machines can benefit from the attachment.



# ACCESSORIES

## Pipe Cradles

Pipe cradles reduce the risk of fatigue by providing a secure way to lift pipes when working from a scissor lift or even an S or Z boom lift. The pipe cradle assembly mounts to the platform guardrails with U-bolts and rests on the floor of the platform when installed. Call one of our friendly team to enquire about pipe cradle availability.

## Sanctuary Zone

The Sanctuary Zone is a 'Tier 1 hierarchy of safety' device that prevents the operator of a Mobile Elevating Work Platform (MEWP) being crushed against overhead obstructions.

The Sanctuary Zone is a simple, strong and extremely reliable device comprising steel frames that project above the machine platform, preventing any operator injuries from happening through crushing, rather than reacting to the crushing once it has occurred.

## Harnesses

The IPAF recommendation is that an operator wears a full body harness with an adjustable lanyard, when working from a boom type MEWP or vehicle mounted boom. The harness provides work restraint and can be adjusted to be as short as possible.

For more information from IPAF and details of their 'Clunk Click' harness campaign visit [www.ipaf.org](http://www.ipaf.org)

Harness and lanyard sets are available to purchase at the time of hire.

## Wheel Covers and Nappies

The majority of electric machines are fitted with non-marking tyres, to reduce the risk of damaging finished floors. These machines are easily identified by the non-marking tyre icon in the machine specification section. Wheel covers can be fitted to protect the flooring on machines without non-marking tyres.

Nappies (drip trays) are heavy duty sheets attached to the underside of hydraulically operated access equipment which catch the majority of oil and fuel spillages or drips. The nappy will protect floor surfaces and reduce the risk of contamination. Available in various sizes, nappies are ideal for most large scissor and boom lifts. Not available for small battery scissor or narrow aisle boom platforms.

## NATIONAL COVERAGE

React Access are able to offer National Coverage through our Network of independent partners, allowing us to be committed to the levels of service we command but on a national basis.

We are able to provide all types of access equipment anywhere at anytime.






# POWER TOWERS PECOLIFT

Alternative Machines: NANO

Working Height	3.5m
Closed Length	0.98m
Closed Height	1.55m
Closed Width	0.75m
Platform Size	0.72m x 0.60m
Max SWL	150kg
Weight	180kg

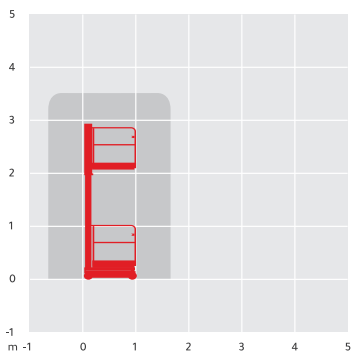



## DEKSURFER

Working Height **3.5m - 6m**

Closed Length **1.35m**


Closed Height **1.97m**

Closed Width **0.65m**

Platform Size **0.90m x 0.65m**

Max SWL **150kg**


Weight **95kg - 105kg**

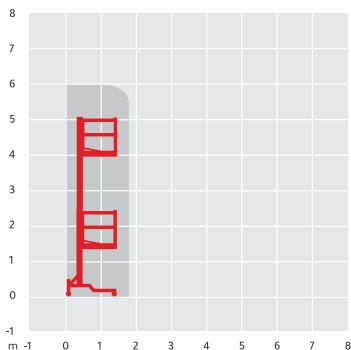

# POWER TOWERS NANO

Alternative Machines: Pop Up

Working Height	4.5m
Closed Length	1.195m
Closed Height	1.56m
Closed Width	0.75m
Platform Size	1m x 0.73m
Max SWL	200kg
Weight	285kg

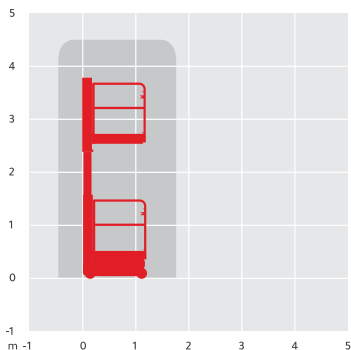




## YOUNGMAN BoSS X3

Alternative Machines: BoSS X3X


Working Height	4.55m
Closed Length	1.21m
Closed Height	1.8m
Closed Width	0.7m
Platform Size	1.05m x 0.57m
Max SWL	240kg
Weight	349kg

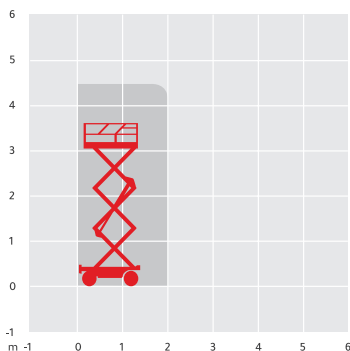

# POWER TOWER

Alternative Machines: BoSS X3X

Working Height	5.1m
Closed Length	1.6m
Closed Height	1.85m
Closed Width	0.78m
Platform Size	1.52m x 0.75m
Max SWL	250kg
Weight	345kg

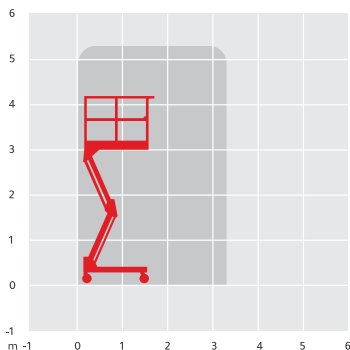




## YOUNGMAN BoSS X3X

Alternative Machines: BoSS X3

Working Height	5.2m
Closed Length	1.25m
Closed Height	1.8m
Closed Width	0.76m
Platform Size	1.25m x 0.57m
Max SWL	240kg
Weight	370kg

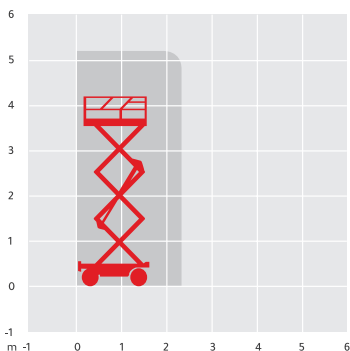

# GENIE GR12

Alternative Machines: NANO SP

Working Height **5.58m**

Closed Length **1.35m**

Closed Height **1.79m**


Closed Width **0.76m**

Platform Size **0.89m x 0.75m**

Platform Length  
(deck extended) **1.35m**

Max SWL **227kg**

Weight **748kg**

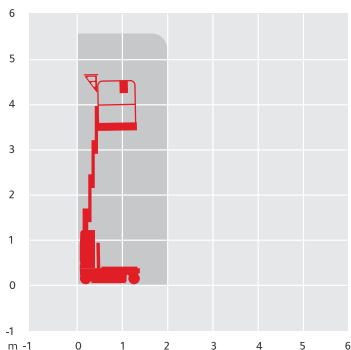





## SKYJACK SJ16

Working Height **6.75m**

Closed Length **1.37m**

Closed Height **1.79m**


Closed Width **0.76m**

Platform Size **0.69m x 0.93m**

Platform Length  
(deck extended) **1.34m**

Max SWL **227kg**

Weight **966kg**

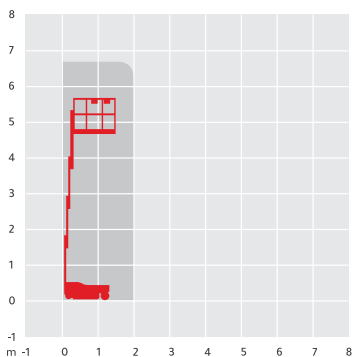




# GENIE GR20

Alternative Machines: SJ3219

Working Height	7.85m
Closed Length	1.35m
Closed Height	1.98m
Closed Width	0.8m
Platform Size	0.89m x 0.75m
Platform Length (deck extended)	1.4m
Max SWL	159kg
Weight	1,112kg

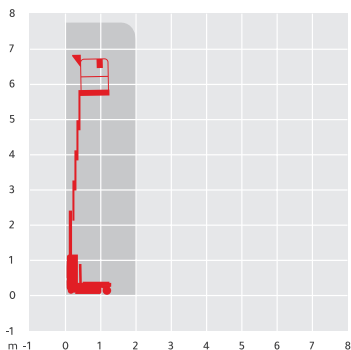




## GENIE AWP25S


Alternative Machines: AWP20S

Working Height	<b>9.57m</b>
Closed Length	<b>1.31m</b>
Closed Height	<b>1.98m</b>
Closed Width	<b>0.74m</b>
Platform Size	<b>1.14m x 0.66m</b>
Max SWL	<b>159kg</b>
Weight	<b>330kg</b>

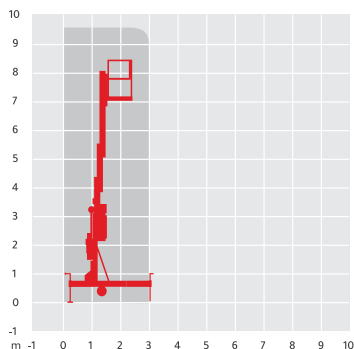

# DINGLI DL1530

Working Height	5.6m
Closed Length	1.44m
Closed Height	2.03m
Stowed Height (guardrails lowered)	1.67m
Closed Width	0.76m
Platform Size	1.29m x 0.70m
Platform Length (deck extended)	1.89m
Max SWL	240kg
Weight	880kg

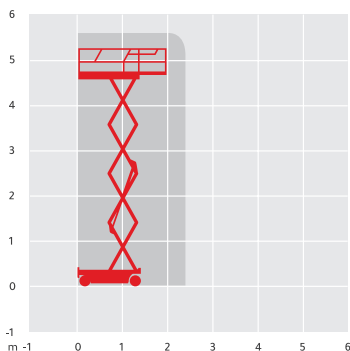




## DINGLI DL1932

Alternative Machines: SJ3219


Working Height	<b>7.8m</b>
Closed Length	<b>1.86m</b>
Closed Height	<b>2.18m</b>
Stowed Height (guardrails lowered)	<b>1.84m</b>
Closed Width	<b>0.76m</b>
Platform Size	<b>1.67m x 0.74m</b>
Platform Length (deck extended)	<b>2.57m</b>
Max SWL	<b>230kg</b>
Weight	<b>1,415kg</b>

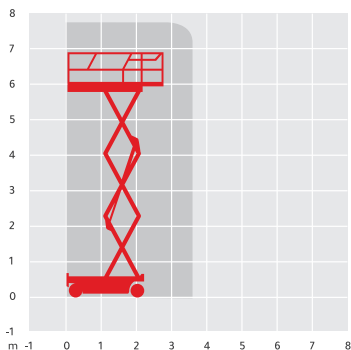

# SKYJACK SJ3219

Alternative Machines: DL1932


Working Height	7.8m
Closed Length	1.78m
Closed Height	2.11m
Stowed Height (guardrails lowered)	1.64m
Closed Width	0.81m
Platform Size	1.63m x 0.71m
Platform Length (deck extended)	2.53m
Max SWL	227kg
Weight	1,312kg

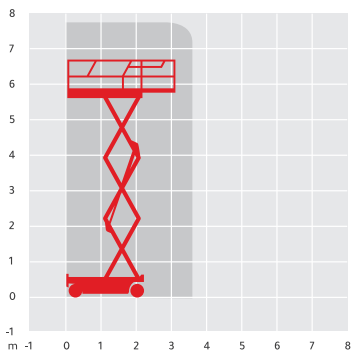




## SKYJACK SJ3220

Working Height	8.1m
Closed Length	2.32m
Closed Height	2.08m
Stowed Height (guardrails lowered)	1.73m
Closed Width	0.81m
Platform Size	2.13m x 0.71m
Platform Length (deck extended)	3.04m
Max SWL	408kg
Weight	1,594kg

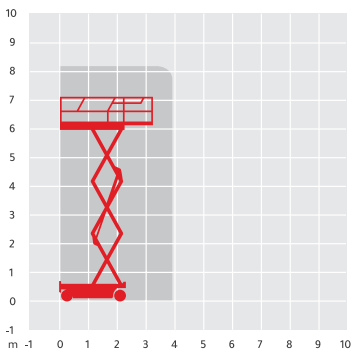

# SKYJACK SJ4626

Working Height	9.9m
Closed Length	2.31m
Closed Height	2.15m
Stowed Height (guardrails lowered)	1.79m
Closed Width	1.17m
Platform Size	2.11m x 1.07m
Platform Length (deck extended)	3.01m
Max SWL	454kg
Weight	2,130kg

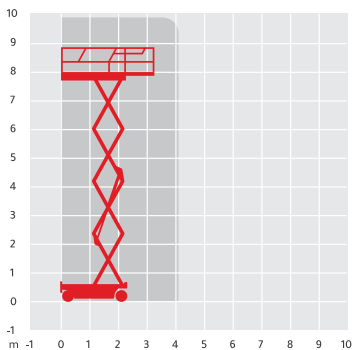





## SKYJACK SJ3226

Alternative Machines: GS2632

Working Height **9.92m**

Closed Length **2.32m**

Closed Height **2.15m**

Stowed Height  
(guardrails lowered) **1.91m**


Closed Width **0.81m**

Platform Size **2.13m x 0.71m**

Platform Length  
(deck extended) **3.32m**

Max SWL **227kg**

Weight **1,890kg**

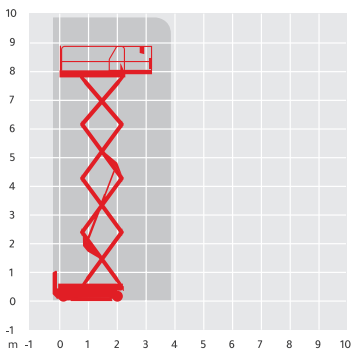



# SKYJACK SJ4632

Working Height **11.75m**

Closed Length **2.31m**

Closed Height **2.24m**

Stowed Height  
(guardrails lowered) **1.88m**



Closed Width **1.17m**

Platform Size **2.11m x 1.07m**

Platform Length  
(deck extended) **3.01m**

Max SWL **317kg**


Weight **2,300kg**

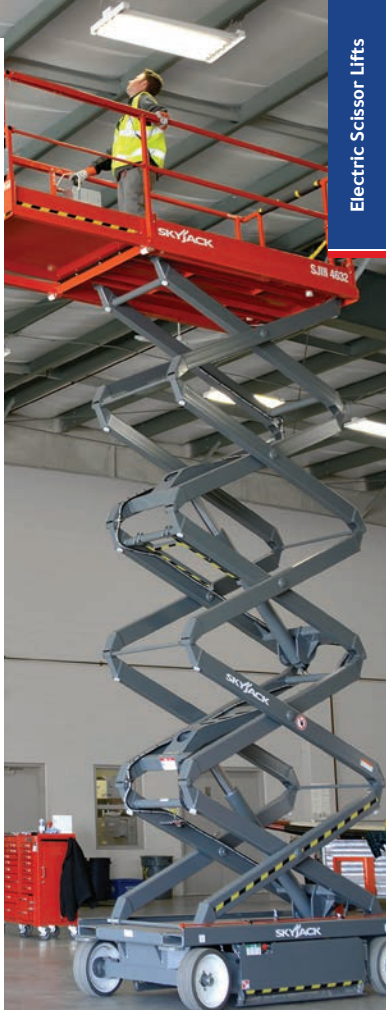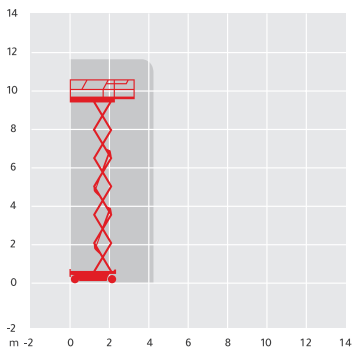




## SKYJACK SJ4726

Working Height	9.63m
Closed Length	2.32m
Closed Height	2.29m
Stowed Height (guard rails lowered)	1.90m
Closed Width	1.19m
Platform Size	1.07m x 2.11m
Platform Length (deck extended)	2.11m
Max SWL	454kg
Weight	2,511kg

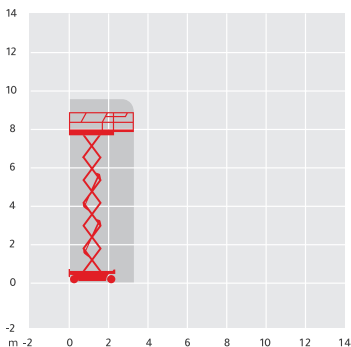

# SKYJACK SJ4732


Working Height	11.46m
Closed Length	2.32m
Closed Height	2.39m
Stowed Height (guard rails lowered)	1.99m
Closed Width	1.19m
Platform Size	1.07m x 2.11m
Platform Length (deck extended)	2.11m
Max SWL	318kg
Weight	2,492kg

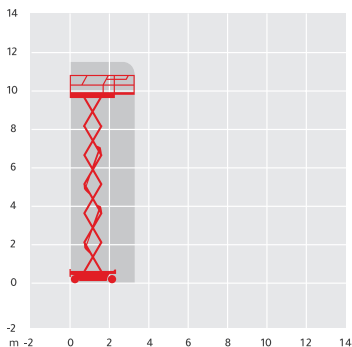




## GENIE GS3232

Working Height	11.75m
Closed Length	2.44m
Closed Height	2.44m
Stowed Height (guardrails lowered)	2.03m
Closed Width	0.81m
Platform Size	2.26m x 0.81m
Platform Length (deck extended)	3.33m
Max SWL	227kg
Weight	2,352kg

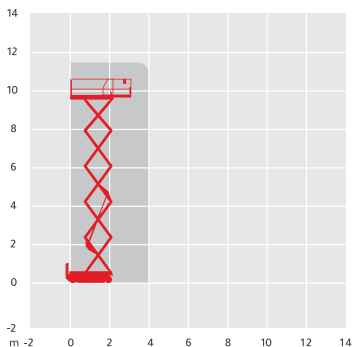

# HAULOTTE COMPACT 14


Working Height	13.8m
Closed Length	2.74m
Closed Height	2.74m
Stowed Height (guardrails lowered)	2.08m
Closed Width	1.2m
Platform Size	2.3m x 1.2m
Platform Length (deck extended)	3.22m
Max SWL	350kg
Weight	3,175kg

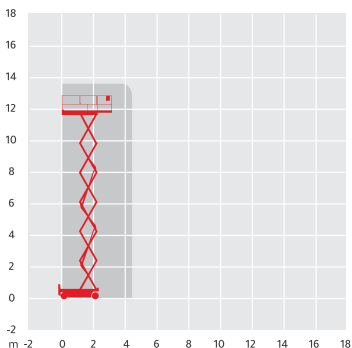



## SKYJACK SJ4740


Working Height	13.8m
Closed Length	2.4m
Closed Height	2.48m
Stowed Height (guardrails lowered)	2.21m
Closed Width	1.19m
Platform Size	2.19m x 1.06m
Platform Length (deck extended)	3.09m
Max SWL	350kg
Weight	2,985kg

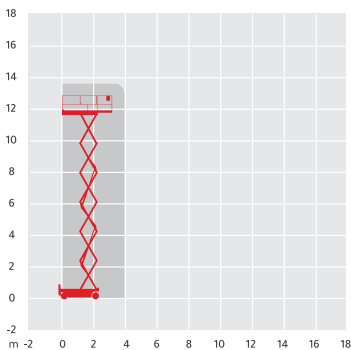

# JLG M4069

Alternative Machines: SJ8841, 4069LE

Working Height	14.19m
Closed Length	3.1m
Closed Height	2.83m
Stowed Height (guardrails lowered)	2.01m
Closed Width	1.75m
Platform Size	2.92m x 1.65m
Platform Length (deck extended)	3.83m
Max SWL	360kg
Weight	5,700kg

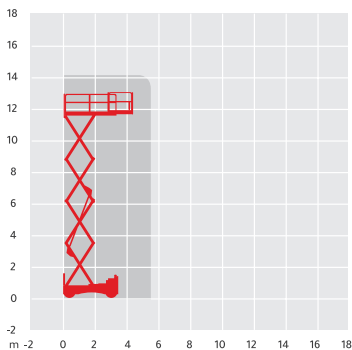






## JLG 4069LE

Alternative Machines: SJ8841, M4069


Working Height	<b>14.19m</b>
Closed Length	<b>3.1m</b>
Closed Height	<b>2.83m</b>
Stowed Height (guardrails lowered)	<b>2.01m</b>
Closed Width	<b>1.75m</b>
Platform Size	<b>2.92m x 1.65m</b>
Platform Length (deck extended)	<b>3.83m</b>
Max SWL	<b>360kg</b>
Weight	<b>5,300kg</b>

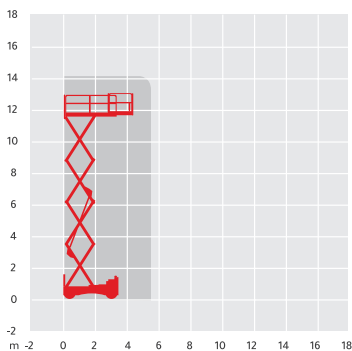



# DINGLI DL1612


Working Height	15.7m
Closed Length	2.84m
Closed Height	2.59m
Stowed Height (guardrails lowered)	2.05m
Closed Width	1.25m
Platform Size	2.64m x 1.12m
No Deck Extension	
Max SWL	250kg
Weight	3,130kg

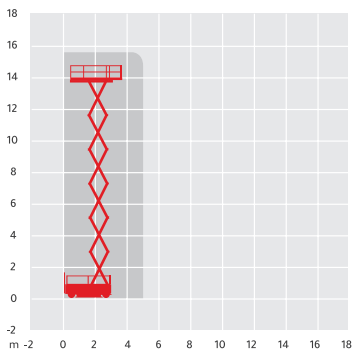



## HOLLAND LIFT N165EL12

Working Height	18.5m
Closed Length	3.74m
Closed Height	3.4m
Stowed Height (guardrails lowered)	2.65m
Closed Width	1.2m
Platform Size	3.38m x 1.16m
Platform Length (deck extended)	4.88m
Max SWL	500kg
Weight	7,985kg

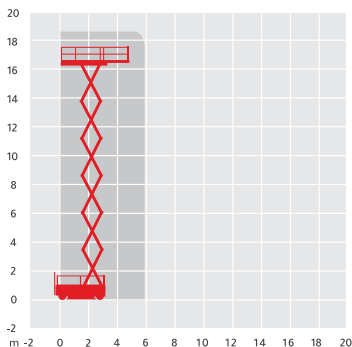

# HOLLAND LIFT N195EL12

Working Height **21.4m**

Closed Length **3.74m**

Closed Height **3.01m**

Stowed Height  
(guardrails lowered) **3.74m**


Closed Width **1.2m**

Platform Size **3.38m x 1.16m**

Platform Length  
(deck extended) **7m**

Max SWL **500kg**


Weight **9,120kg**

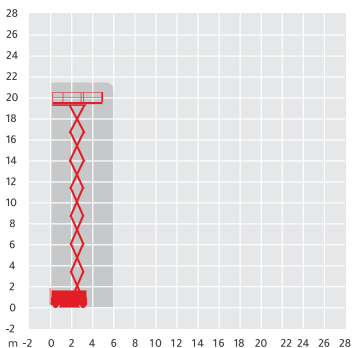



# SKYJACK SJ6826 RT


Working Height	9.9m
Closed Length	3.12m
Closed Height	2.37m
Stowed Height (guardrails lowered)	1.61m
Closed Width	1.72m
Platform Size	2.42m x 1.42m
Platform Length (deck extended)	3.94m
Max SWL	567kg
Weight	3,305kg

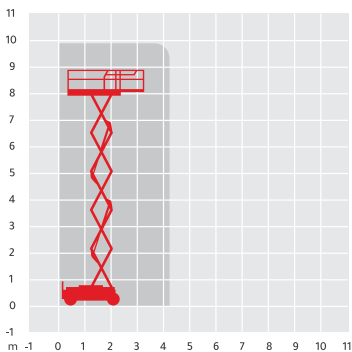



## SKYJACK SJ6832 RT

Working Height	11.75m
Closed Length	3.12m
Closed Height	2.51m
Stowed Height (guardrails lowered)	1.75m
Closed Width	1.72m
Platform Size	2.44m x 1.42m
Platform Length (deck extended)	3.94m
Max SWL	454kg
Weight	3,655kg

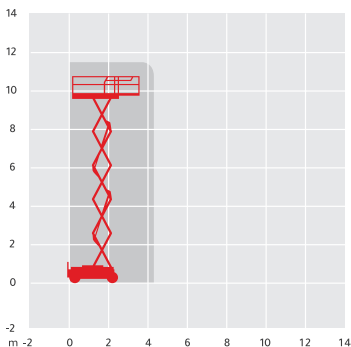




# GENIE GS4390

Alternative Machines: NANO


Working Height	15.1m
Closed Length	4.88m
Closed Height	2.93m
Stowed Height (guardrails lowered)	2.25m
Closed Width	2.29m
Platform Size	4.88m x 1.83m
Platform Length (deck extended)	7.38m
Max SWL	680kg
Weight	6,384kg

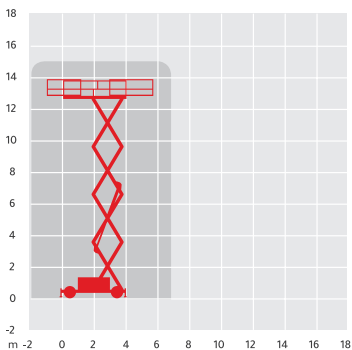



## SKYJACK SJ9250

Working Height	17.2m
Closed Length	4.47m
Closed Height	3.16m
Stowed Height (guardrails lowered)	2.29m
Closed Width	2.34m
Platform Size	4.27m x 1.88m
Platform Length (deck extended)	5.77m
Max SWL	681kg
Weight	7,395kg

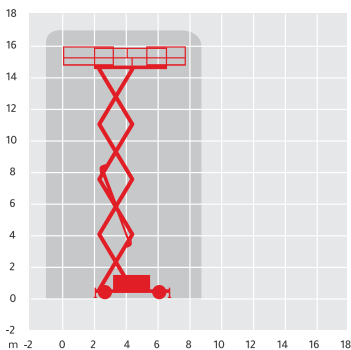




# GENIE GS5390

SJ9250, LL20X

Working Height	18.15m
Closed Length	4.88m
Closed Height	3.15m
Stowed Height (guardrails lowered)	2.47m
Closed Width	2.29m
Platform Size	4.88m x 2.29m
Platform Length (deck extended)	7.38m
Max SWL	680kg
Weight	8,050kg

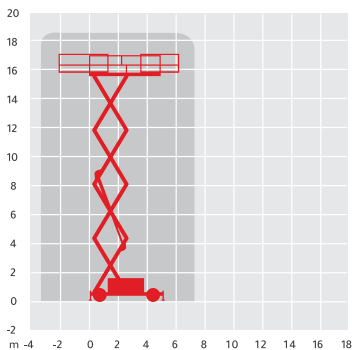



## HAULOTTE STAR 10

Working Height **10m**

Horizontal Outreach **3m**

Closed Length **2.7m**

Closed Height **1.99m**


Closed Width **1m**

Platform Size **0.99m x 0.78m**

Rotation **345°**


Max SWL **200kg**

Weight **2,735kg**

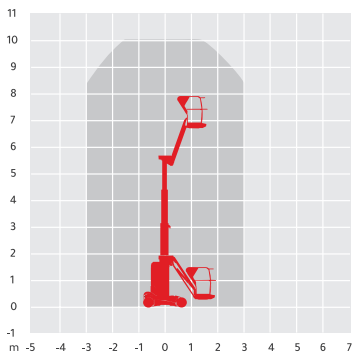

# GENIE Z30-20 NRJ

Working Height	11m
Horizontal Outreach	6.4m
Closed Length	5.2m
Closed Height	2m
Closed Width	1.2m
Platform Size	1.17m x 0.76m
Rotation	355°
Max SWL	227kg
Weight	6,577kg

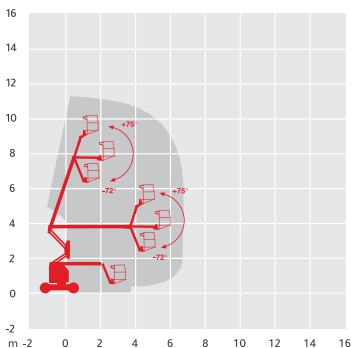



## NIFTYLIFT HR12N

Alternative Machines: NANO

Working Height **12.2m**

Horizontal Outreach **6.1m**

Closed Length **4.1m**

Closed Height **1.9m**


Closed Width **1.5m**

Platform Size **1.1m x 0.65m**

Rotation **360°**

Max SWL **200kg**

Weight **3,060kg**

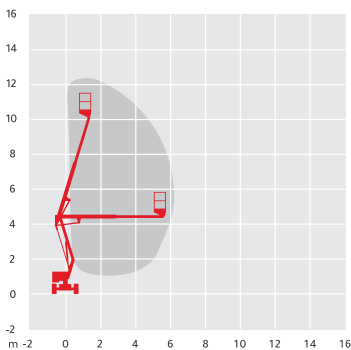

# NIFTYLIFT HR15NDE

Alternative Machines: 40EN, Z45Bi Energy, Z45/25J RT

Working Height **15.4m**

Horizontal Outreach **9.6m**

Closed Length **5m**

Closed Height **2.1m**


Closed Width **1.5m**

Platform Size **1.5m x 0.7m**

Rotation **360°**

Max SWL **225kg**

Weight **6,680kg**

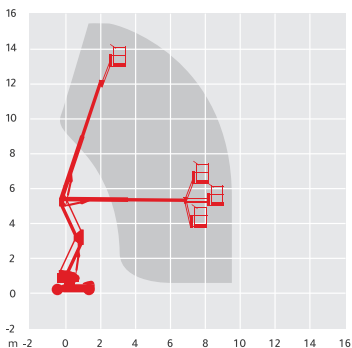



## GENIE Z45 BI-ENERGY

Alternative Machines: 40EN, HR15NDE, Z45/25J RT

Working Height **15.87m**

Horizontal Outreach **7.62m**

Closed Length **5.56m**

Closed Height **2m**


Closed Width **1.79m**

Platform Size **1.83m x 0.76m**

Rotation **355° Continuous**

Max SWL **227kg**

Weight **6,963kg**

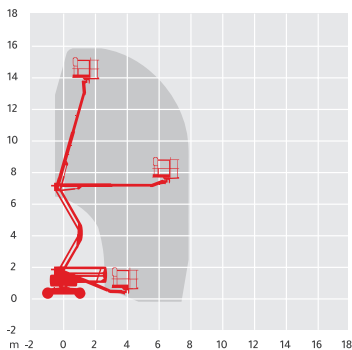

# GENIE Z45/25J RT

Alternative Machines: 40EN, HR15NDE, Z45 Bi-Energy

Working Height **16.05m**

Horizontal Outreach **7.52m**

Closed Length **6.65m**

Closed Height **2.13m**



Closed Width **2.29m**

Platform Size **1.83m x 0.76m**

Rotation **355°**

Max SWL **227kg**

Weight **6,123kg (air tyres)**  
**6,460kg (foam tyres)**

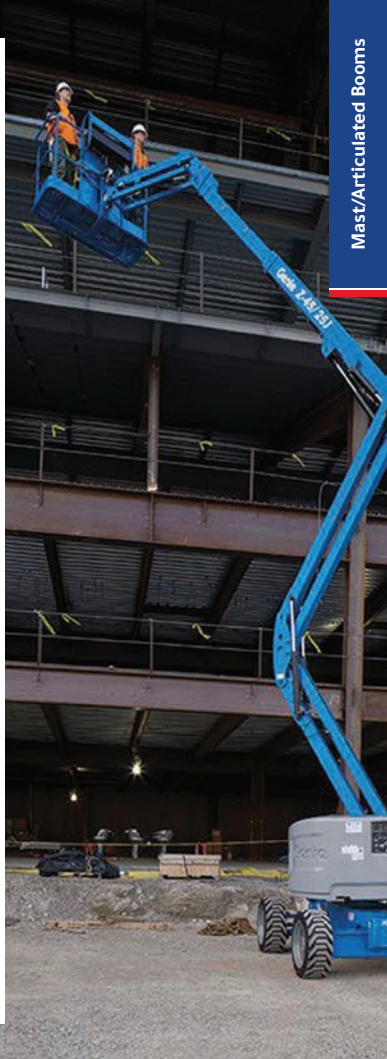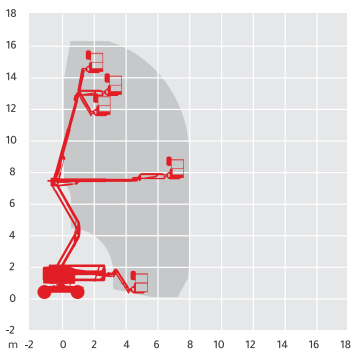





## NIFTYLIFT HR17NDE

Working Height **17.2m**

Horizontal Outreach **9.6m**

Closed Length **6.3m**

Closed Height **2.1m**


Closed Width **1.5m**

Platform Size **1.5m x 0.7m**

Rotation **180°**

Max SWL **225kg**

Weight **6,680kg**

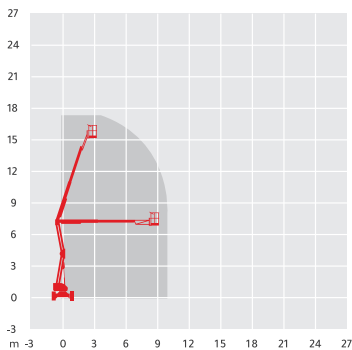

# JLG E600J

Alternative Machines: HR21NDE

Working Height **20.29m**

Horizontal Outreach **13.06m**

Closed Length **9.37m**

Closed Height **2.57m**


Closed Width **2.44m**

Platform Size **1.83m x 0.76m**

Rotation **400°**

Max SWL **230kg**

Weight **6,759kg**

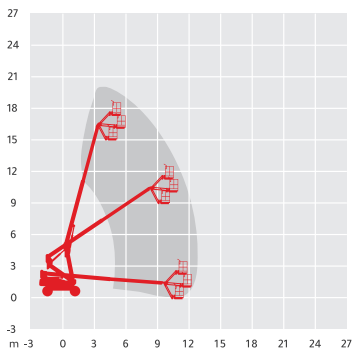



## NIFTYLIFT HR21NDE

Alternative Machines: E600J, HR21 4x4

Working Height **20.8m**

Horizontal Outreach **12.5m**

Closed Length **5.3m**

Closed Height **2.15m**


Closed Width **2.27m**

Platform Size **1.8m x 0.85m**

Rotation **360°**

Max SWL **225kg**

Weight **6,220kg**

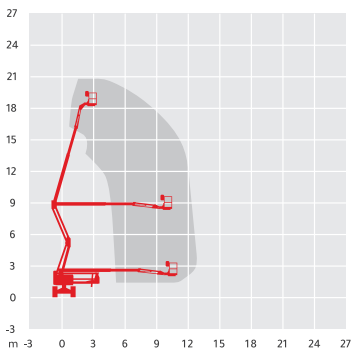

# NIFTYLIFT HR21 4x4

Alternative Machines: E600J, HR21NDE

Working Height **20.8m**

Horizontal Outreach **12.8m**

Closed Length **5.3m**

Closed Height **2.15m**


Closed Width **2.27m**

Platform Size **1.8m x 0.85m**

Rotation **100°**

Max SWL **225kg**

Weight **6,500kg**

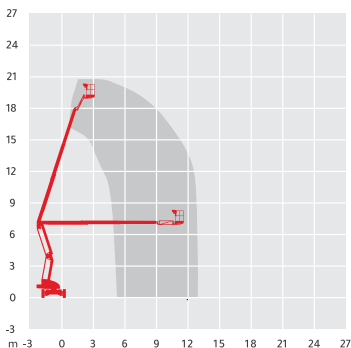



## JLG 800AJ

Working Height **24.38m**

Horizontal Outreach **15.8m**

Closed Length **11.13m**

Closed Height **3m**


Closed Width **2.44m**

Platform Size **0.91m x 2.44m**

Rotation **360°**

Max SWL **227kg**

Weight **15,558kg**

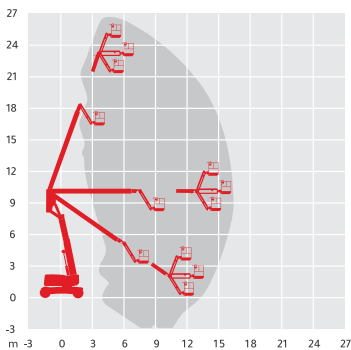

# GENIE Z80/60

Alternative Machines: 800AJ

Working Height **25.6m**

Horizontal Outreach **18.29m**

Closed Length **11.27m**

Closed Height **3m**


Closed Width **2.49m**

Platform Size **2.44m x 0.91m**

Rotation **Continuous**

Max SWL **227kg**

Weight **17,010kg**

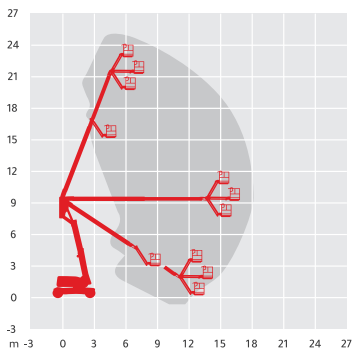

## NIFTYLIFT HR28 HYBRID 4x4

Working Height **28m**

Horizontal Outreach **19m**

Closed Length **7.3m**

Closed Height **2.7m**


Closed Width **2.49m**

Platform Size **2.4m x 0.90m**

Rotation **180°**

Max SWL **280kg**

Weight **14,650kg**

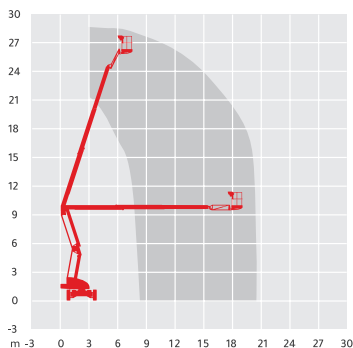









## GENIE S45

Working Height	<b>15.72m</b>
Horizontal Outreach	<b>11.18m</b>
Closed Length	<b>8.48m</b>
Closed Height	<b>2.49m</b>
Closed Width	<b>2.24m / 2.31m (Tr)</b>
Platform Size 8ft	<b>2.44m x 0.91m</b>
Platform Size 6ft	<b>1.83m x 0.76m</b>
Rotation	<b>360° Continuous</b>
Max SWL	<b>227kg</b>
Weight	<b>6,709 - 7,927kg</b>
Reach Below Ground	<b>1.5m</b>

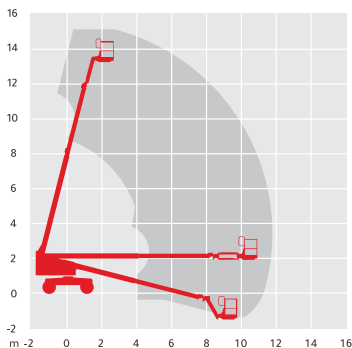

# GENIE S65

Working Height	21.8m
Horizontal Outreach	17.1m
Closed Length	9.42m
Closed Height	2.72m
Closed Width	2.49m / 2.59m (Tr)
Platform Size 8ft	2.44m x 0.91m
Platform Size 6ft	1.83m x 0.76m
Rotation	360° Continuous
Max SWL	227kg
Weight	10,024 - 12,229kg
Reach Below Ground	2.72m

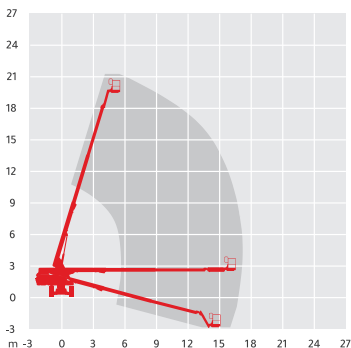




## GENIE S85

Alternative Machines: 860SJ

Working Height	27.9m
Horizontal Outreach	23.32m
Closed Length	12.4m
Closed Height	2.8m
Closed Width	2.5m
Platform Size	1.83m x 0.76m
Rotation	360° Continuous
Max SWL	227kg
Weight	17,236kg
Reach Below Ground	2.89m

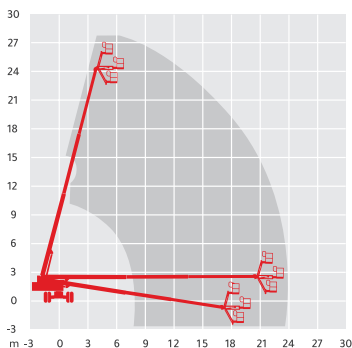



## SPECIALIST ACCESS

React Access can supply a full range of specialist access platforms to meet with your requirements, call our experts today with your requirements.









# AVIATION SPECIALISTS

We have over 30 years of experience in supplying access equipment into the aviation industry. React Access can supply both the standard range of access platforms including scissor lifts and boom lifts, together with specialised GSE and hangar docking units. Equipment can be supplied for all aircraft areas including hangar, apron and ramp duties.

Many Airlines and aircraft facilities have used our designers and engineers expertise to speed up the turnaround of aircraft maintenance in a safe and efficient manner.







Unit 12, Drayton Rd  
Newton Longville  
Milton Keynes  
MK17 0BU

+44 (0)1908 383100  
+44 (0)330 090 4100  
info@reactaccess.com

[www.reactaccess.com](http://www.reactaccess.com)